

**YODHA** CREW CAB  
4X2

**YODHA** CREW CAB  
4X4

NO ROAD IS IMPOSSIBLE




**D+4**  
Seating



**74.8 kW (100 hp)**  
Higher Power

\*T&C Apply



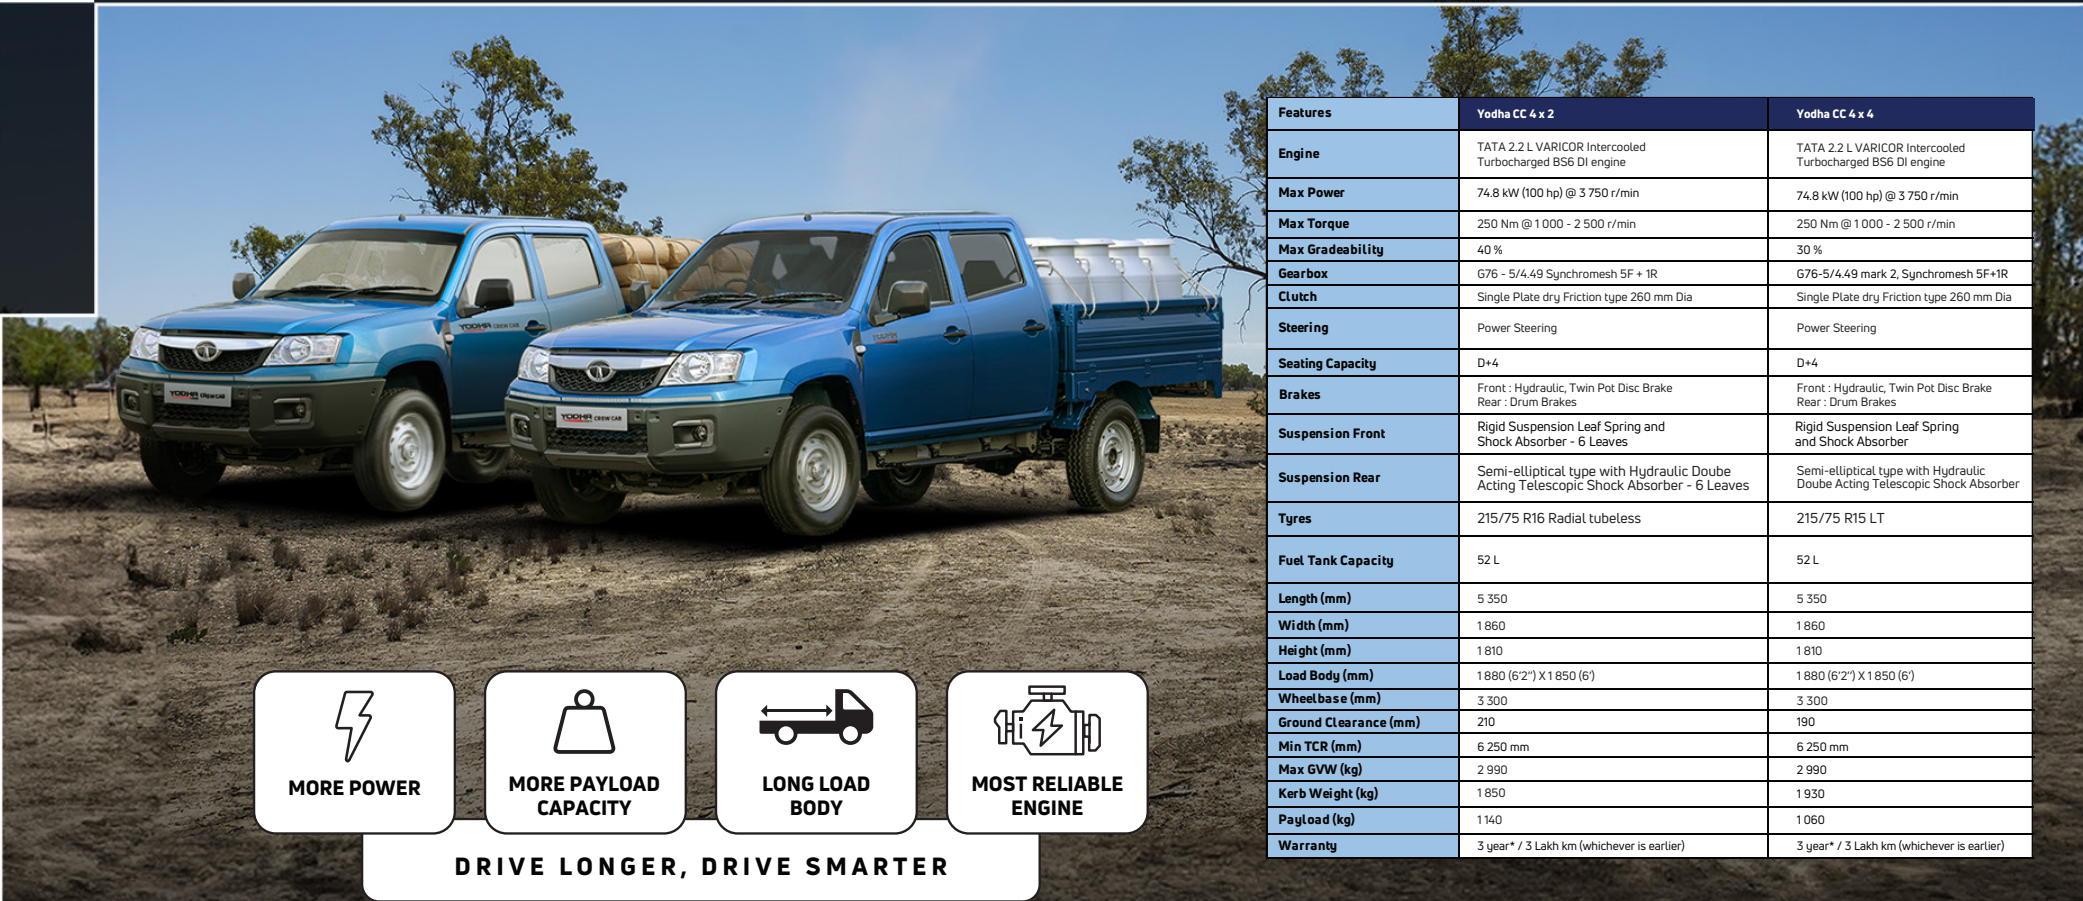

| Features                     | Yodha CC 4 x 2   | Yodha CC 4 x 4  |
|------------------------------|--|---|
| <b>Engine</b>                | TATA 2.2 L VARICOR Intercooled Turbocharged BS6 DI engine                              | TATA 2.2 L VARICOR Intercooled Turbocharged BS6 DI engine                   |
| <b>Max Power</b>             | 74.8 kW (100 hp) @ 3 750 r/min   | 74.8 kW (100 hp) @ 3 750 r/min  |
| <b>Max Torque</b>            | 250 Nm @ 1 000 - 2 500 r/min   | 250 Nm @ 1 000 - 2 500 r/min  |
| <b>Max Gradeability</b>      | 40 %   | 30 %  |
| <b>Gearbox</b>               | G76 - 5/4.49 Synchronmesh 5F + 1R  | G76-5/4.49 mark 2, Synchronmesh 5F+1R                                       |
| <b>Clutch</b>                | Single Plate dry Friction type 260 mm Dia  | Single Plate dry Friction type 260 mm Dia                                   |
| <b>Steering</b>              | Power Steering   | Power Steering  |
| <b>Seating Capacity</b>      | D+4  | D+4   |
| <b>Brakes</b>                | Front : Hydraulic, Twin Pot Disc Brake<br>Rear : Drum Brakes                           | Front : Hydraulic, Twin Pot Disc Brake<br>Rear : Drum Brakes                |
| <b>Suspension Front</b>      | Rigid Suspension Leaf Spring and Shock Absorber - 6 Leaves                             | Rigid Suspension Leaf Spring and Shock Absorber                             |
| <b>Suspension Rear</b>       | Semi-elliptical type with Hydraulic Double Acting Telescopic Shock Absorber - 6 Leaves | Semi-elliptical type with Hydraulic Double Acting Telescopic Shock Absorber |
| <b>Tyres</b>                 | 215/75 R16 Radial tubeless   | 215/75 R15 LT   |
| <b>Fuel Tank Capacity</b>    | 52 L   | 52 L  |
| <b>Length (mm)</b>           | 5 350  | 5 350   |
| <b>Width (mm)</b>            | 1 860  | 1 860   |
| <b>Height (mm)</b>           | 1 810  | 1 810   |
| <b>Load Body (mm)</b>        | 1 880 (6'2") X 1 850 (6')  | 1 880 (6'2") X 1 850 (6')   |
| <b>Wheelbase (mm)</b>        | 3 300  | 3 300   |
| <b>Ground Clearance (mm)</b> | 210  | 190   |
| <b>Min TCR (mm)</b>          | 6 250 mm   | 6 250 mm  |
| <b>Max GVW (kg)</b>          | 2 990  | 2 990   |
| <b>Kerb Weight (kg)</b>      | 1 850  | 1 930   |
| <b>Payload (kg)</b>          | 1 140  | 1 060   |
| <b>Warranty</b>              | 3 year* / 3 Lakh km (whichever is earlier)   | 3 year* / 3 Lakh km (whichever is earlier)                                  |



**DRIVE LONGER, DRIVE SMARTER**

The illustrations and photographs may show accessories and items of optional equipment which are not part of the standard specifications. Due to printing processes, colours may vary slightly from those shown. All listed specifications are current and subject to change or upgrade without prior notice, in accordance with the company's policy of continuous improvement. Terms & conditions apply.