

**TATA MOTORS PICKUPS YODHA**

**UNMATCHED COMFORT & PERFORMANCE FOR YOUR BUSINESS**

No road is impossible



**YODHA**

## KEY FEATURES



**POWERFUL PERFORMANCE**  
WITH 100 hp @3 750 r/min,  
250 Nm TORQUE



**STURDY 3-PIECE METALLIC BUMPER**  
FOR EASE OF REPAIRS AND SERVICEABILITY




**210 mm GROUND CLEARANCE FOR SAFETY**  
AND EASY NAVIGATION ON ROUGH TERRAIN



**FLAT LAYDOWN RECLINER SEATS WITH HEADREST**  
AND HVAC (HEATING VENTILATION  
AND AIR CONDITIONING)/ BLOWER VARIANT\*



**3 YEAR/ 3 LAKH km WARRANTY,**  
MAINTENANCE FREE AGGREGATES FOR LIFE

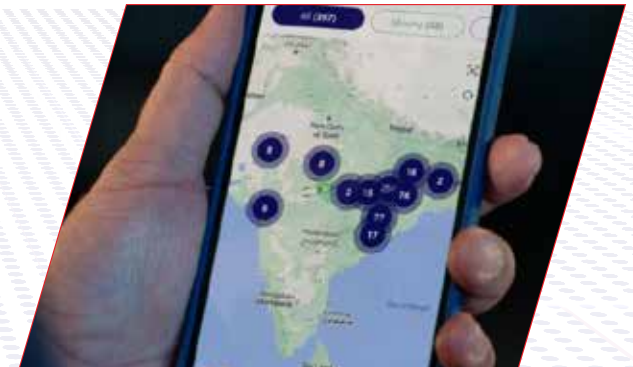

**FLEET EDGE ENABLED - GPS, FUEL EFFICIENCY,**  
DRIVER NOTIFICATIONS

# YODHA 2.0

*Prepare to conquer any terrain  
with our powerful pickup,  
featuring SUV-like comfort  
and power in a truck  
with 2 000 kg payload.*



2 TON PAYLOAD



30% GRADEABILITY



ECO-SWITCH



3 300 mm LONG WHEELBASE

# YODHA EX

*Get ready to boost your business with a powerful pickup built with advanced features and independent coil suspension designed for comfort and performance.*



40% GRADEABILITY



INDEPENDENT COIL  
SPRING SUSPENSION



TILT ADJUSTABLE STEERING



3 300 mm LONG WHEELBASE

# YODHA 4X4

*Experience unmatched versatility  
with features designed for  
off roading capabilities with  
superior gradability and  
ground clearance.*



**62 % GRADEABILITY**



**HYDRAULIC CLUTCHPLATE**




**2 317 mm (7.6 ft.) x 1 793 mm (5.9 ft.)  
BIG LOADING AREA**



**GROUND CLEARANCE - 210 MM**

# YODHA 1700

*A sturdy pickup truck engineered with a robust build, 16" big tyres enhances stability in high load condition and high speed operation.*

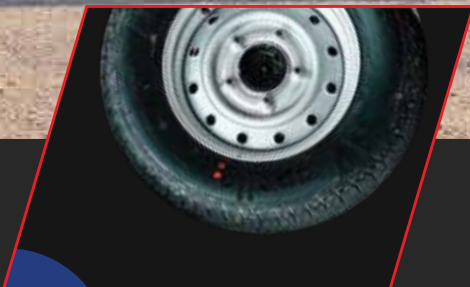

16" BIG TYRE



HEATING, VENTILATION,  
AND AIR CONDITIONING OPTIONAL



3 300 mm LONG WHEELBASE



FLEET EDGE ENABLED

	YODHA 2000	YODHA 1700	YODHA 4X4	YODHA EX
<b>Engine type</b>	TATA 2.2L VARICOR Intercooled Turbocharged BS6 DI engine			
<b>Max engine output</b>	74.8 kW (100 hp) @ 3 750 r/min			
<b>Max engine Torque</b>	250 Nm@1 000 - 2 500 r/min			
<b>Fuel tank capacity</b>	52L Polymer Tank			
<b>Clutch</b>	Single Plate dry Friction type 260 mm Dia			
<b>Gearbox</b>	G76-5/4.49 mark 2, Synchromesh 5F+1R			
<b>Steering</b>	Power Steering			
<b>Front suspension</b>	Rigid suspension with semi-elliptical leaf springs - 6 leaves		Rigid suspension with semi-elliptical leaf springs - 5 leaves	Double wishbone type independent coil spring
<b>Rear suspension</b>	Innovative Two stage Semi-elliptical leaf springs - 9 leaves		Rigid suspension with semi-elliptical leaf springs - 7 leaves	Parabolic leaf springs
<b>Anti Roll Bar</b>	Front			
<b>Front brakes</b>	Hydraulic, twin pot Disc Brake			
<b>Rear brakes</b>	Drum Brake			
<b>Tyre</b>	215/75 R 16 Radial		215/75 R15	215/75 R 16 Radial
<b>Rim size</b>	16 inch		15 inch	16 inch
<b>External Load body</b>	2 650 mm (8.7 ft.) x 1 850 mm (6 ft.)		2 317mm (7.6 ft.) x 1 793mm (5.9 ft.)	2 650 mm (8.7 ft.) x 1 850 mm (6 ft.)
<b>Turning Circle Radius</b>	6 250 mm			
<b>Ground Clearance (mm)</b>	210 mm			
<b>Air conditioning (HVAC)</b>	NA	Optional	NA	Optional
<b>Dimensions</b>				
<b>Wheel Base (mm)</b>	3 300		2 975	3 300
<b>Width (mm)</b>	1 860		1 860	1 860
<b>Length (mm)</b>	5 350		5 005	5 350
<b>Height (mm)</b>	1 810		1 810	1 810
<b>Weights</b>				
<b>GVW (kg)</b>	3 840	3 490	2 990	2 990
<b>Kerb weight (kg)</b>	1 840	1 790	1 780	1 760
<b>Payload (kg)</b>	2 000	1 700	1 210	1 230
<b>Performance</b>				
<b>Gradability</b>	30%	34%	62%	40%
<b>Seating Capacity</b>	D+1			
<b>Engine Oil change interval</b>	20 000 km			
<b>Warranty (On Driveline)</b>	3 Years/3 Lac km			